

EM24 W1



Energy analyzer for 1-phase and 3-phase systems, wireless M-Bus communication



Benefits

- **Time saving set-up**, by frontal joystick and selector.
- **Error-proof installation**, by self-power supply and phase sequence detection.
- **Easy variable scrolling**, by means of the front joystick.
- **Flexible installation**, by means of the direct connection up to 65 A or the connection of 5 A current transformers.
- **Accurate measurement**. It is compliant with the international accuracy standard IEC/EN62053-21, and the IEC/EN61557-12 performance requirements (active power and active energy).
- **Legal metrology**, guaranteed by the MID approval
- **Wireless communication**, wireless M-Bus version allows remote data collection when cabling is not possible due to cost or installation requirements.
- **Easy commissioning** of wireless communication thanks to the test function of the joystick and to transmission counter for diagnostics.

Description

Three-phase energy analyzer for DIN-rail mounting with configuration joystick, frontal selector and LCD display. Direct connection up to 65A or via current and voltage transformers.

The wireless M-Bus communication is the perfect solution when cabling is not possible.

Applications

EM24 is the perfect solution in any application, specially in building and industrial automation where energy and main electrical variables monitoring is required.

EM24 is particularly suited for:

- energy efficiency monitoring
- cost allocation
- fiscal/legal sub-billing, where the wireless M-Bus version is the best choice for quick and easy installation without cables. Encryption ensures data security and safeguards confidentiality.

Main functions

- Measurement of energy consumption and main electrical variables of single-phase, two-phase or three-phase loads.
- Display of single phase measurements and total measurements.
- Easy connection function.
- Transmission of data via wireless M-Bus (868 MHz for the European market).
- Two wireless M-Bus versions: a compact model with internal antenna and a SMA connector model with external antenna (in case of metallic switchboard).

Main features

- TRMS measurements of distorted sine waves (voltages/currents)
- Data encryption (a unique key will be provided for any device in a sealed envelope included in the instrument box)
- Compliant with IEC/EN61557-12 performance requirements (active power and active energy)

Structure

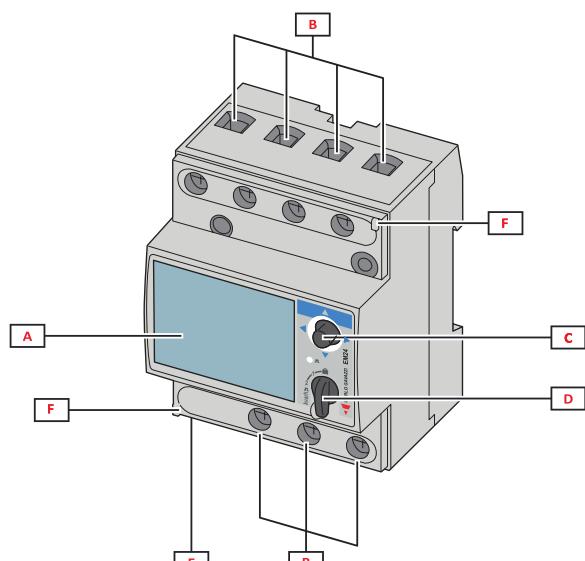


Fig. 1 Direct connection

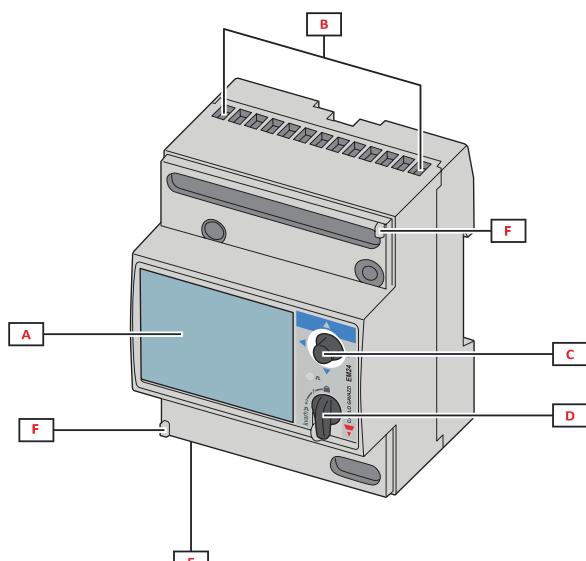


Fig. 2 CT connection

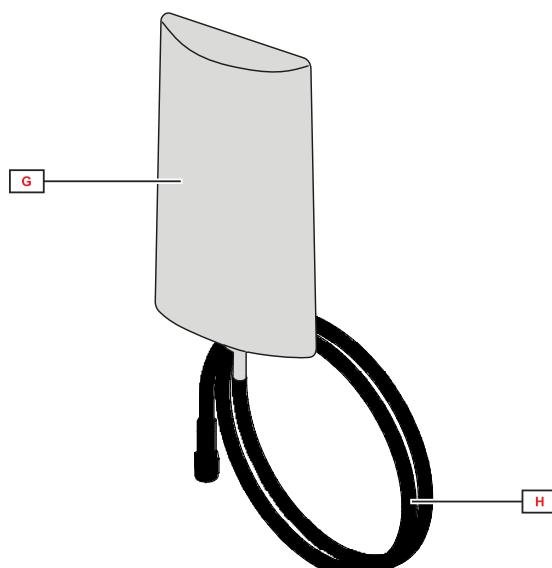



Fig. 3 External antenna (only for EM24DINAV...W1E...)

Area	Description
A	LCD display
B	Voltage/current connections
C	Joystick
D	Selector with pin for MID seal (programming block)
E	Inputs/outputs or communication port
F	Pins for MID seal (protection covers included)
G	External antenna for wireless M-Bus communication
H	SMA connector cable (2 m)

Features

General

Protection degree	Front: IP50. Terminals: IP20
Terminals	Screw terminals AV2: Max.: 16 mm ² , min.: 2.5 mm ² (by cable lug) AV5: Max.: 1.5 mm ²
Oversupply category	Cat. III
Utilisation category	UC2
Pollution degree	2
Noise rejection (CMRR)	100 dB, from 42 to 62 Hz
Mounting	DIN rail
Weight	400 g (packaging included) 800 g with external antenna (packaging included)

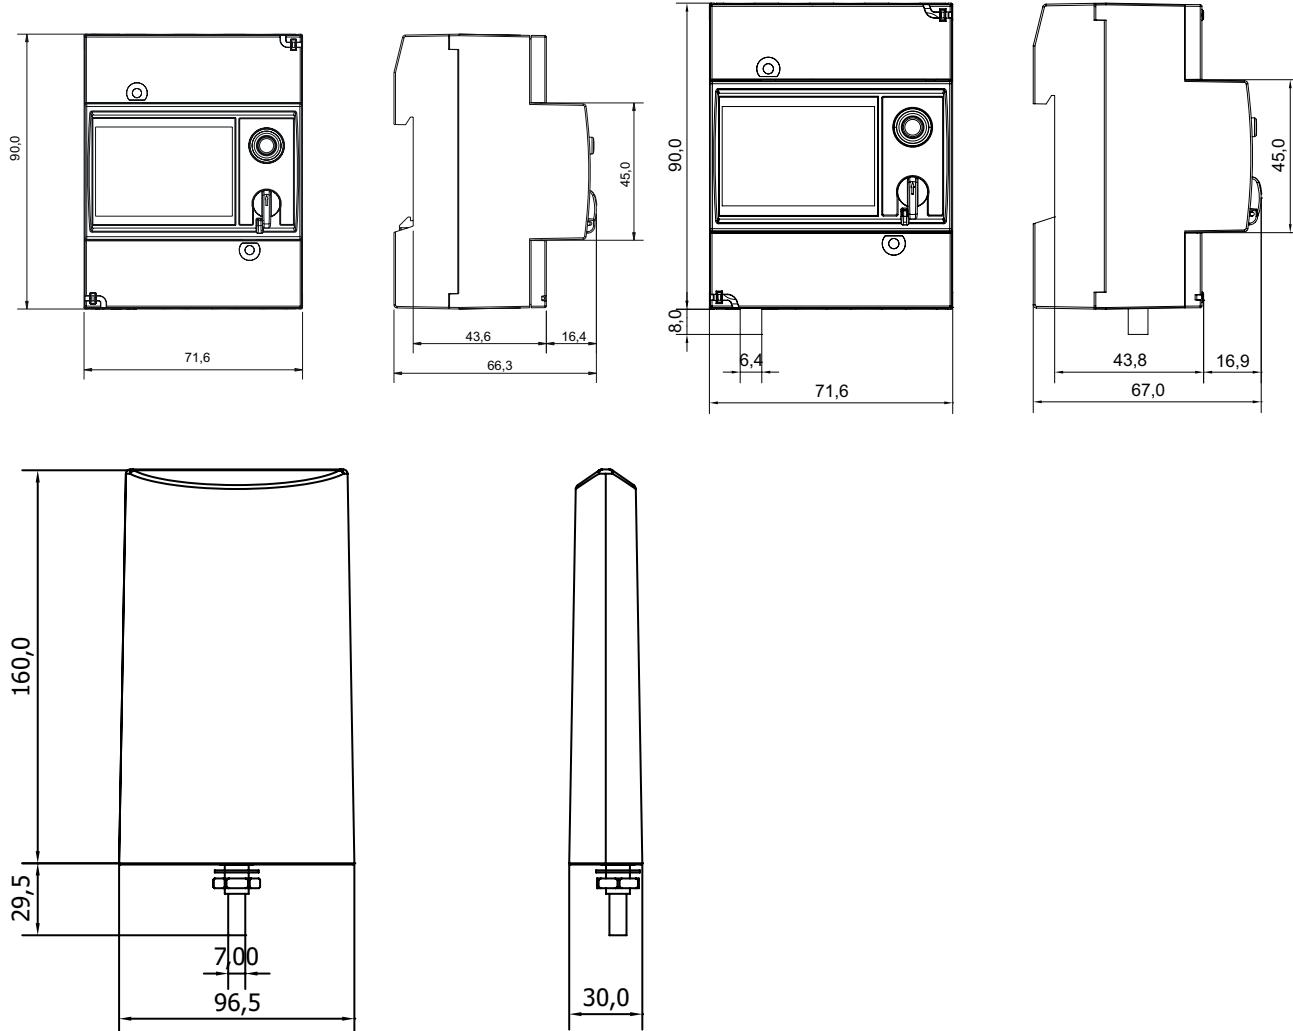

► Environmental specifications

Operating temperature	From -25 to +55 °C/from -13 to +131 °F
Storage temperature	From -30 to +70 °C/from -22 to +158 °F

NOTE: R.H. < 90 % non-condensing @ 40 °C / 104 °F.

► Compatibility and conformity

Directives	2011/65/EU (RoHs), 2014/53/EU (RED)
Standards	Electromagnetic compatibility (EMC) - emissions and immunity: EN 62052-11 Electrical safety: EN 61010-1, EN 50470-1 (MID), UL 61010-1 Accuracy: EN 62053-21, EN 62053-23, EN 50470-3 (MID), IEC/EN61557-12 (active power and active energy, MID models only)
Approvals	  MID (PF only)

► Electrical specifications

Voltage - MID models		
Voltage inputs	AV2	AV5
Voltage connection	Direct	
Rated voltage L-N (from Un min to Un max)	133 to 230 V	230 V
Rated voltage L-L (from Un min to Un max)	230 to 400 V	400 V
Voltage tolerance (*)	-20%, +15%	
Overload (**)	Continuous: 1.15 Un max	
Input impedance	Refer to "Power supply"	
Frequency	50 Hz	

Voltage - Non MID models (according to IEC 62052-11)		
Voltage inputs	AV2	AV5
Voltage connection		
Rated voltage L-N (from Un min to Un max)	120 to 277 V	120 to 277 V
Rated voltage L-L (from Un min to Un max)	208 to 480 V	208 to 480 V
Voltage tolerance (*)	-20%, +15%	
Overload (**)	Continuous: 1.15 (Un max)	Continuous: 1.2 (Un max)
Input impedance	Refer to "Power supply"	>1600 kΩ
Frequency	50/60 Hz	

(*) reference range for stated accuracy

(**) max reference for no instrument damage

Current		
Current inputs	AV2	AV5
Current connection	Direct	Via CT
Rated current (In)	-	5 A
Base current (Ib)	10 A	-
Minimum current (Imin)	0.5 A	0.05 A
Maximum current (Imax)	65 A	10 A
Start-up current (Ist)	0.04 A	0.01 A
Overload	Continuous: 65 A @50 Hz For 10 ms: 1950 A @50 Hz	Continuous: 10 A @50 Hz For 500 ms: 200 A @ 50 Hz
Short circuit withstand	For 10 ms: 4500 A according to IEC 62052-31:2015	-
Input impedance	< 1.1 VA	< 0.6 VA
Crest factor	4 (Imax peak 92 A)	3 (Imax peak 15 A)

Maximum CTxVT ratio		
Current inputs	AV2	AV5
Non-MID models except E1	-	4629
Non-MID models: E1, W1	-	6975
MID models except E1	-	3150
MID models: E1, W1	-	2615

► Power supply

Non MID models		
	AV2	AV5
Type	Self power supply	Self power supply

MID models		
	AV2	AV5
Type		Self power supply
Consumption		W1: 2.7VA /1.8W

► Measurements

Method	TRMS measurements of distorted waveforms
Sampling	1600 samples/s @50 Hz 1900 samples/s @60 Hz

► Available measurements

Active energy	Unit	System	Phase	Note
Imported (+) Total	kWh+	•	•	
Imported (+) partial	kWh+	•	-	
Exported (-) Total	kWh-	•	-	

Reactive energy	Unit	System	Phase
Imported (+) Total	kvarh+	•	-
Imported (+) partial	kvarh+	•	-
Exported (-) Total	kvarh-	•	-
Imported (+) by tariff	kvarh+	•	-

Electrical variable	Unit	System	Phase
Voltage L-N	V	•	•
Voltage L-L	V	•	•
Current	A	-	•
DMD MAX	A	•	-
Active power	kW	•	•
DMD	kW	•	-
DMD MAX	kW	•	-
Apparent power	kVA	•	•
DMD	kVA	•	-
DMD MAX	kVA	•	-
Reactive power	kvar	•	•
Power factor	PF	•	•
Frequency	Hz	•	-
Run hour meter	h	•	-

Measurement mode

Depending on the APPLICATION setting, a different selection of variables is available on the display (see manual) and the energy calculation is worked out as follows:

- Standard: both kWh+ and kWh- are available;
- EC: easy connection function, the power is always integrated (both in case of positive and negative power).

In MID analyzers the calculation depends on the model:

- PFA: Easy connection, the total energy totalizer (kWh+) is certified according to MID;
- PFB: only the total positive totalizer (kWh+) is certified according to MID. The negative energy totalizer is available but not certified according to MID.

Energy metering

For every measuring interval time, the energies of the single phases are summed; according to the sign of the result, the positive (kWh+) or negative totalizer (kWh-) is increased.

Example:

P L1= +2 kW, P L2= +2 kW, P L3= -3 kW

Integration time = 1 hour

$$+\text{kWh}=(+2+2-3)\times 1\text{h}=(+1)\times 1\text{h}=1 \text{ kWh}$$

$$-\text{kWh}=0 \text{ kWh}$$

Measurement accuracy

Current	AV2	AV5
From 0.5 A to 2 A	±(0.5% rdg + 3dgt)	-
From 2 A to 65 A	±(0.5% rdg + 1dgt)	-
From 0.05 A to 1 A	-	±(0.5% rdg + 3dgt)
From 1 A to 10 A	-	±(0.5% rdg + 1dgt)

Phase-phase voltage	AV2	AV5
In the range Un		$\pm(1\% \text{ rdg} + 1\text{dgt})$
Phase-neutral voltage	AV2	AV5
In the range Un		$\pm(0.5\% \text{ rdg} + 1\text{dgt})$
Active and apparent power	AV2	AV5
From 1.0 A to 65.0 A (PF=0.5L, 1, 0.8C)	$\pm(1\% \text{ rdg} + 1\text{dgt})$	-
From 0.5 A to 1.0 A (PF=1)	$\pm(1.5\% \text{ rdg} + 1\text{dgt})$	-
From 0.25 A to 10 A (PF=0.5L, 1, 0.8C)	-	$\pm(1\% \text{ rdg} + 1\text{dgt})$
From 0.05 A to 0.25 A (PF=1)	-	$\pm(1.5\% \text{ rdg} + 1\text{dgt})$
Reactive power	AV2	AV5
From 1.0 A to 2.0 A ($\sin\phi=0.5L$, 0.5C)	$\pm(2.5\% \text{ rdg} + 1 \text{ dgt})$	-
From 0.5 A to 1.0 A ($\sin\phi=1$)		
From 2.0 A to 65.0 A ($\sin\phi=0.5L$, 0.5C)	$\pm(2\% \text{ rdg} + 1 \text{ dgt})$	-
From 1.0 A to 65.0 A ($\sin\phi=1$)		
From 0.25 A to 0.5 A ($\sin\phi=0.5L$, 0.5C)	-	$\pm(2.5\% \text{ rdg} + 1 \text{ dgt})$
From 0.1 A to 0.25 A ($\sin\phi=1$)		
From 0.5 A to 10 A ($\sin\phi=0.5L$, 0.5C)	-	$\pm(2\% \text{ rdg} + 1 \text{ dgt})$
From 0.25 A to 10 A ($\sin\phi=1$)		
Active energy	Class 1 (EN62053-21) Class B (EN50470-3) (MID)	
Reactive energy	Class 2 (EN62053-23)	
Frequency		
From 45 to 65 Hz	$\pm 0.1 \text{ Hz}$	

Measurement accuracy according to IEC/EN61557-12 (MID models)	
Active power	Performance class 1
Active energy	Performance class 2

Type	LCD
Refresh time	< 750 ms
Description	3 rows: 1 st : 8 digits (7 mm) 2 nd : 4 digits (7 mm) 3 rd : 4 digits (7 mm)
Variable readout	Instantaneous: 4 digits, min: 0.000, max: 9999 Energy: 8 digits (imported), 7 digits (exported), min: 0.00, max: 99 999 999

 LED

Model	CT*VT	Weight (kWh per pulse)
AV5	≤ 7	0.001
	> 7 ≤ 70.0	0.01
	> 70 ≤ 700.0	0.1
	> 700	1
AV2	N/A	0.001

Communication ports

► Wireless M-Bus (W1)

Protocols	Wireless M-Bus according to EN13757-3, EN13757-4 . OMS certified (*).
Frame format	A
Frequency	868 MHz
Frame type	Selectable among the followin options: -1: kWh+ -2: kWh+, kvarh+, kvarh-, kW+ -3: kWh+, kvarh+, kvarh-, kW+, kvar+, kvar-, current by phase, voltage by phase, frequency -4: kWh+, kWh-, kvarh+, kvarh-, kW+, kW-, kvar+, kvar-
Mode	T1 or C1
Encryption	No encryption, ENC-Mode 5 (security profile A) or ENC-Mode 7 (security profile B)
Transmission interval	Selectable from 10 s to 60 min
Configuration parameters	Frame type Transmission mode Communication interval Encryption enabling
Configuration mode	Via joystick

Note (*): OMS certification is valid with the following settings:

- Frame type: 2 or 3
- Communication interval: 30 s, 1 m or 5 m
- Encryption enabled (security profile A or B)

Connection Diagrams

Three-phase with neutral (4-wire)

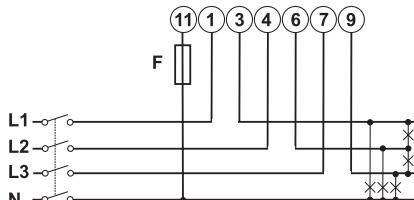


Fig. 4 AV2

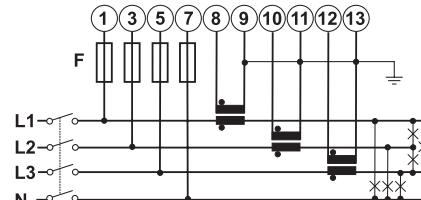


Fig. 5 AV5

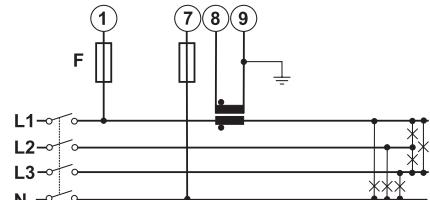


Fig. 6 AV5 balanced load

Three-phase without neutral (3-wire)

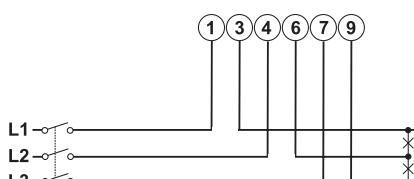


Fig. 7 AV2

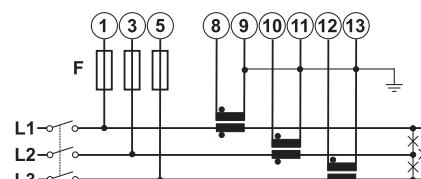


Fig. 8 AV5

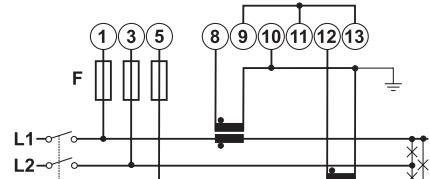


Fig. 9 AV5

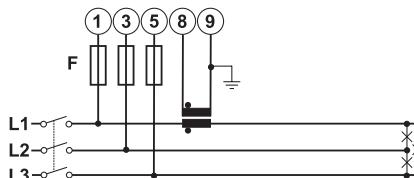


Fig. 10 AV5 balanced load

Single-phase (2-wire)

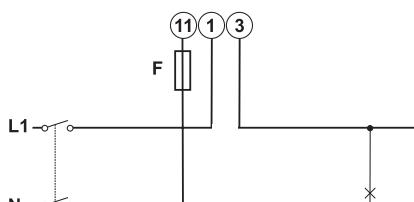


Fig. 11 AV2

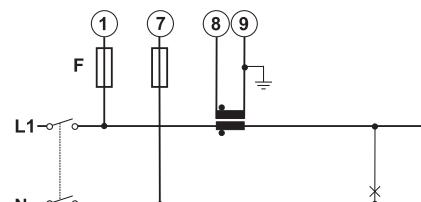


Fig. 12 AV5

Note: F=315 mA

MID connection diagrams

Three-phase with neutral (4-wire)

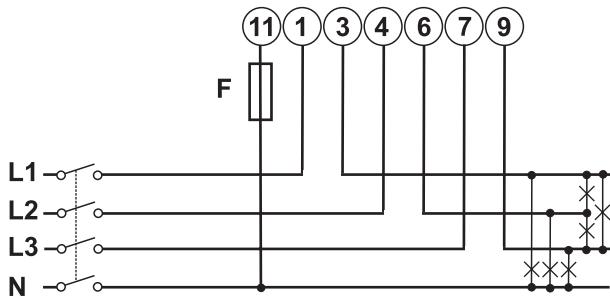


Fig. 13 AV2 3X

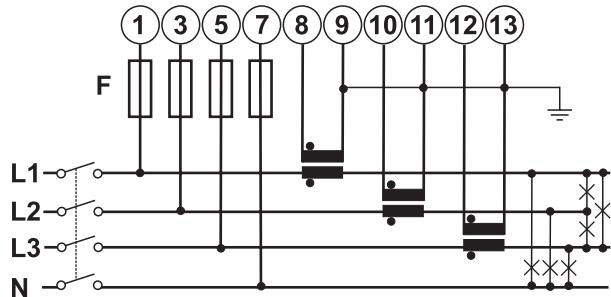


Fig. 14 AV5

Three-phase without neutral (3-wire) (W1 only)

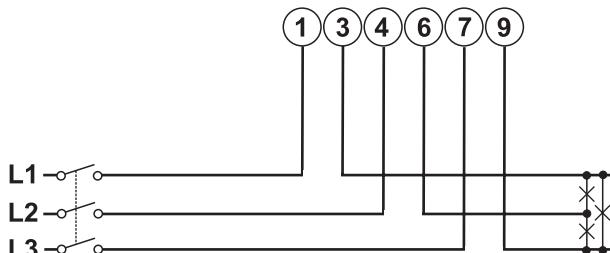


Fig. 15 AV2 3X

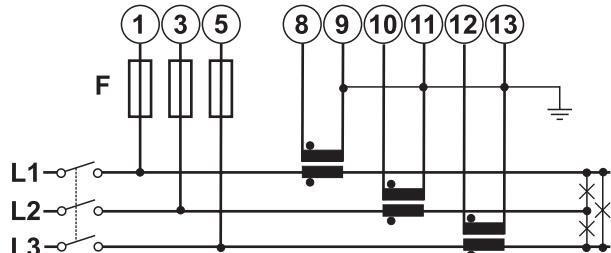


Fig. 16 AV5

Single-phase (2-wire) (W1 only)

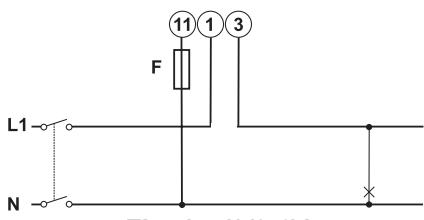


Fig. 17 AV2 1X

Note: F=315 mA

References

► Order code

Component name/part number	I/O communication	Voltage inputs	Current inputs	Power supply
EM24DIN AV5 3X W1 I X	Wireless M-Bus, internal antenna	From 120 to 277 V L-N From 208 to 480 V L-L	5 (10) A via CT	Self power supply
EM24DIN AV5 3X W1 E X	Wireless M-Bus, external antenna	From 120 to 277 V L-N From 208 to 480 V L-L	5 (10) A via CT	Self power supply
EM24DIN AV2 3X W1 I X	Wireless M-Bus, internal antenna	From 120 to 277 V L-N From 208 to 480 V L-L	10 (65) A	Self power supply
EM24DIN AV2 3X W1 E X	Wireless M-Bus, external antenna	From 120 to 277 V L-N From 208 to 480 V L-L	10 (65) A	Self power supply
EM24DIN AV2 1X W1 I X	Wireless M-Bus, internal antenna, 1-phase	From 120 to 277 V L-N	10 (65) A	Self power supply
EM24DIN AV2 1X W1 E X	Wireless M-Bus, external antenna, 1-phase	From 120 to 277 V L-N	10 (65) A	Self power supply

MID models

Component name/part number	I/O communication	Voltage inputs	Current inputs	Power supply
EM24DIN AV5 3X W1 I PFA	Wireless M-Bus, internal antenna	230V L-N 400V L-L	5 (10) A via CT	Self power supply
EM24DIN AV5 3X W1 I PFB	Wireless M-Bus, external antenna	230V L-N 400V L-L	5 (10) A via CT	Self power supply
EM24DIN AV5 3X W1 E PFA	Wireless M-Bus, internal antenna	230V L-N 400V L-L	10(65) A	Self power supply
EM24DIN AV5 3X W1 E PFB	Wireless M-Bus, external antenna	230V L-N 400V L-L	10(65) A	Self power supply
EM24DIN AV2 3X W1 I PFA	Wireless M-Bus, internal antenna	230V L-N 400V L-L	10(65) A	Self power supply
EM24DIN AV2 3X W1 I PFB	Wireless M-Bus, external antenna	230V L-N 400V L-L	10(65) A	Self power supply
EM24DIN AV2 3X W1 E PFA	Wireless M-Bus, internal antenna	230V L-N 400V L-L	10(65) A	Self power supply
EM24DIN AV2 3X W1 E PFB	Wireless M-Bus, external antenna	230V L-N 400V L-L	10(65) A	Self power supply
EM24DIN AV2 1X W1 I PFA	Wireless M-Bus, internal antenna, 1-phase	230V L-N	10(65) A	Self power supply
EM24DIN AV2 1X W1 I PFB	Wireless M-Bus, external antenna, 1-phase	230V L-N	10(65) A	Self power supply
EM24DIN AV2 1X W1 E PFA	Wireless M-Bus, internal antenna, 1-phase	230V L-N	10(65) A	Self power supply
EM24DIN AV2 1X W1 E PFB	Wireless M-Bus, external antenna, 1-phase	230V L-N	10(65) A	Self power supply


- PFA: Easy connection, the total energy totalizer (kWh+) is certified according to MID;
- PFB: only the total positive totalizer (kWh+) is certified according to MID. The negative energy totalizer is available but not certified according to MID.

 **Further reading**

Information	Where to find it
User manual - W1	www.productselection.net/MANUALS/UK/em24_W1_im_use.pdf
Installation instruction - W1	www.productselection.net/MANUALS/UK/em24_W1_im_inst.pdf

 **CARLO GAVAZZI compatible components**

Purpose	Component name/part number	NOTES
Collect data from wireless M-Bus devices and transmit data via Modbus TCP/IP	SIU-MBM-02	See relevant datasheet



COPYRIGHT ©2021

Content subject to change. Download the PDF: www.productselection.net

Mindmill AB

Näckrosgatan 6
464 32 Mellerud
+46 (0)31-758 3000
info@mindmill.se
mindmill.se